



WARNING

READ AND UNDERSTAND ALL INSTRUCTIONS PRIOR TO INSTALLING OR USING THIS PRODUCT. THE FOLLOWING ARE GENERAL SAFETY WARNINGS INTENDED TO BRING ATTENTION TO PROPER INSTALLATION AND AREAS OF THE PRODUCT WHERE PROPER USAGE MUST BE FOLLOWED. FAILURE TO FOLLOW INSTRUCTIONS COULD LEAD TO PRODUCT DAMAGE, PRODUCT FAILURE AND/OR SERIOUS INJURY, OR DEATH.

DO NOT MACHINE WASH OR DRY CLEAN THE PRODUCT. EXPOSURE TO DETERGENTS, BLEACH, OR SOLVENTS MAY RESULT IN EXPEDITED DEGRADATION AND COMPROMISE THE PRODUCT.

INSPECT THE PRODUCT FOR DISCOLORATION, CUTS, TEARS, ABRASIONS OR CRACKS BEFORE AND AFTER EACH USE.

DO NOT EXPOSE THE PRODUCT TO OPEN FLAME OR EXCESSIVE HEAT. DO NOT ALTER THE PRODUCT IN ANY WAY.

OPERATOR'S MANUAL REVERSO SLING v1.01


CONTENTS

- 01 SLING AND PAD DISASSEMBLY
- 02 SLING AND PAD REASSEMBLY
- 03 ATTACHING SLING TO RIFLE
- 04 USING THE RETAINER BAND
- 05 SLING OPERATION

DESIGNED, TESTED, AND MANUFACTURED IN **THE USA**


SEC 01 DISASSEMBLING THE SLING FROM THE PAD

STEP 1

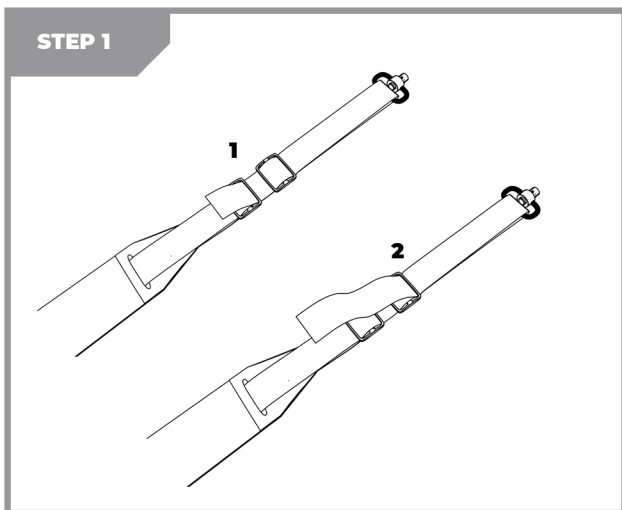


REMOVE THE WEBBING FROM BOTH TRI-GLIDES ON THE SIDE WITHOUT THE ADJUSTER.

STEP 2

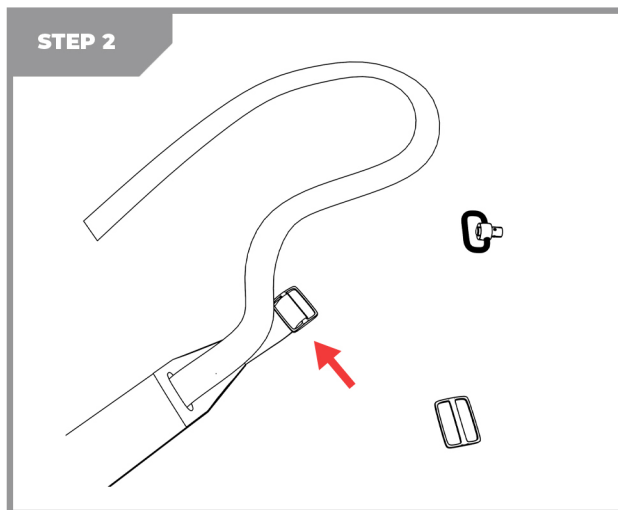


CONTINUE REMOVING THE WEBBING FROM THE QD SLING SWIVEL AND TRIGLIDE ATTACHED TO THE PAD.

STEP 3

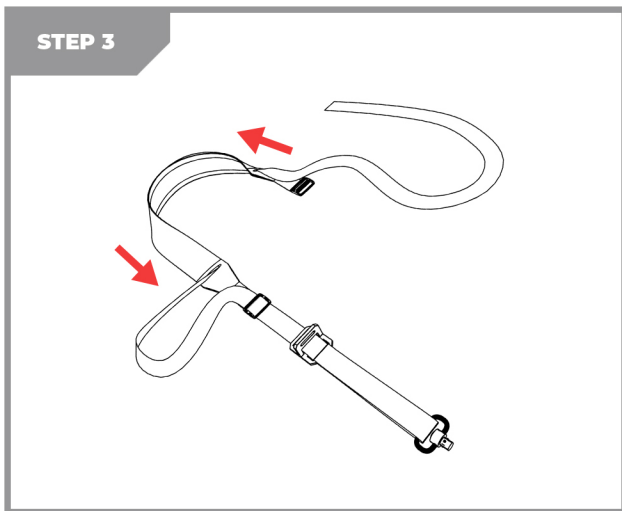

FULLY REMOVE THE WEBBING FROM THE PAD.

STEP 4

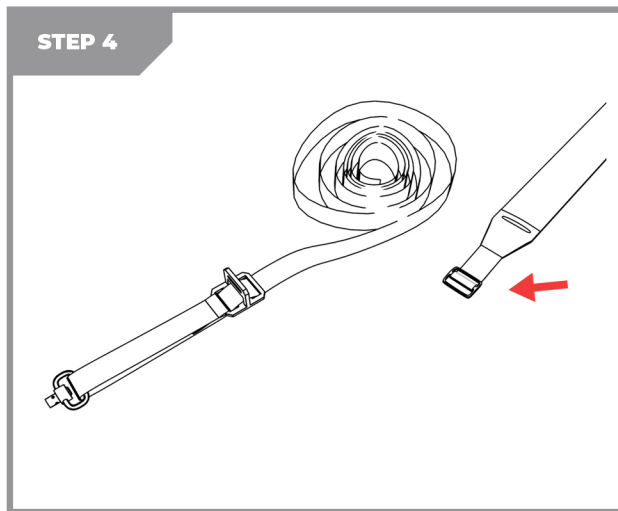


REMOVE THE WEBBING FROM THE TRI-GLIDE ON THE PAD, THEN SEPARATE THE TWO.




SEC 01.2 DISASSEMBLING THE SLING FROM THE PAD

STEP 1

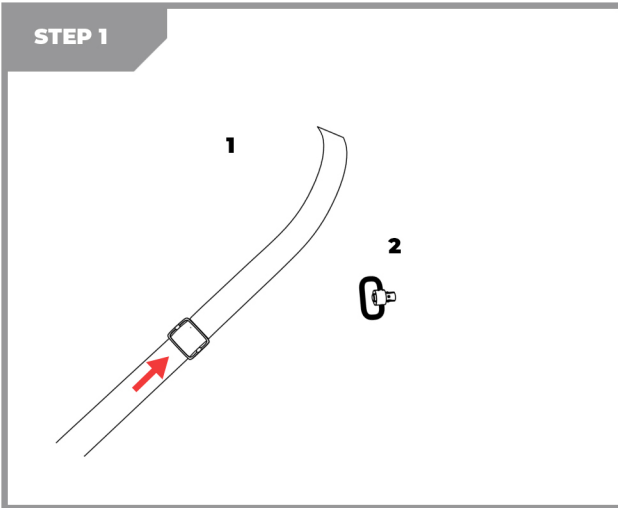


SLIDE WEBBING THROUGH TRIGLIDE

STEP 2

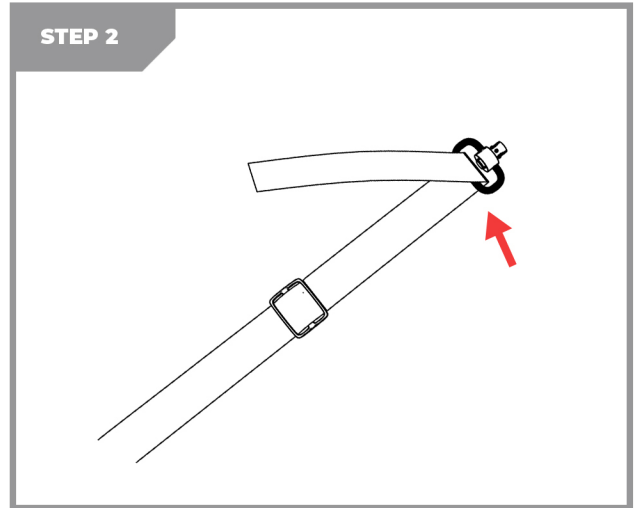


LOOP WEBBING BACK THROUGH SLING SWIVEL

STEP 3

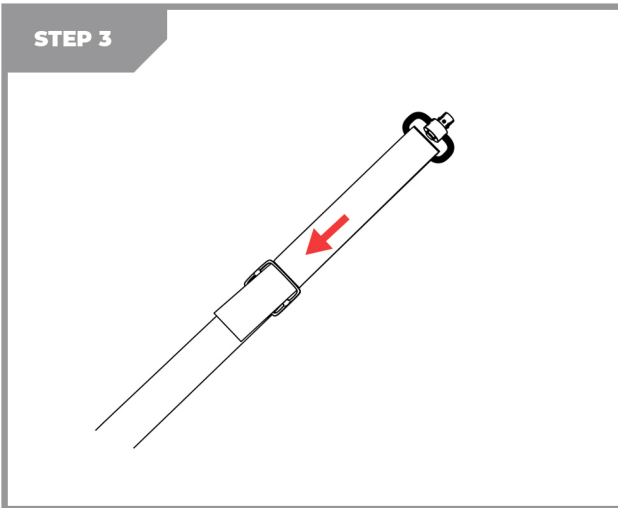

FEED WEBBING BACK INTO TRIGLIDE.

STEP 4

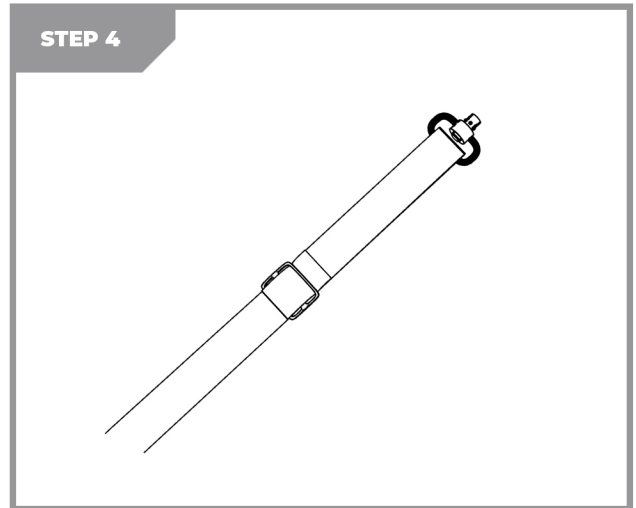


DOUBLE BACK THE EXCESS WEBBING INTO THE TRIGLIDE.




SEC 02 RE-ASSEMBLING THE SLING AND PAD

STEP 1

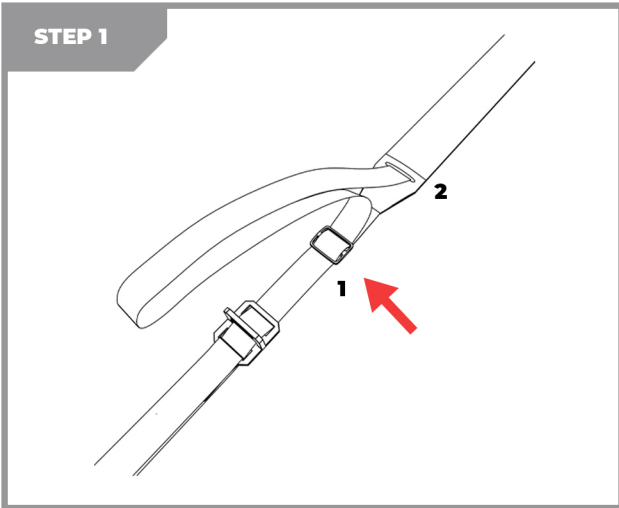


FEED WEBBING THROUGH THE TRI-GLIDE ATTACHED TO THE PAD (**SIDE WITH SIERRATAC TAG**) THEN FEED THE WEBBING THROUGH THE SLOT ON THE PAD.

STEP 2

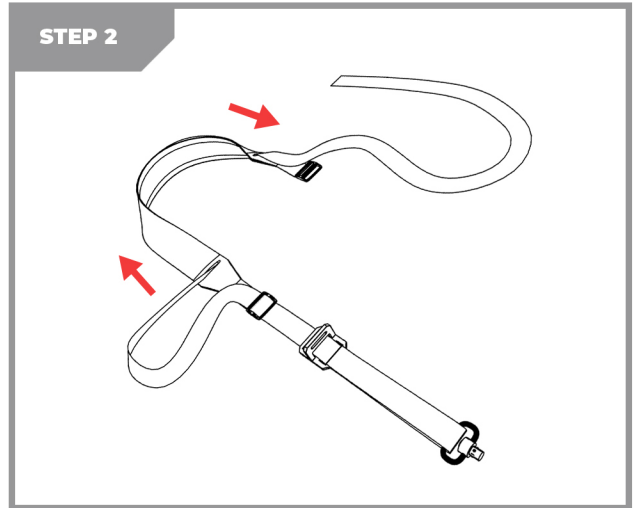


FEED WEBBING ALL THE WAY THROUGH THE PAD AS SHOWN ABOVE.

STEP 3

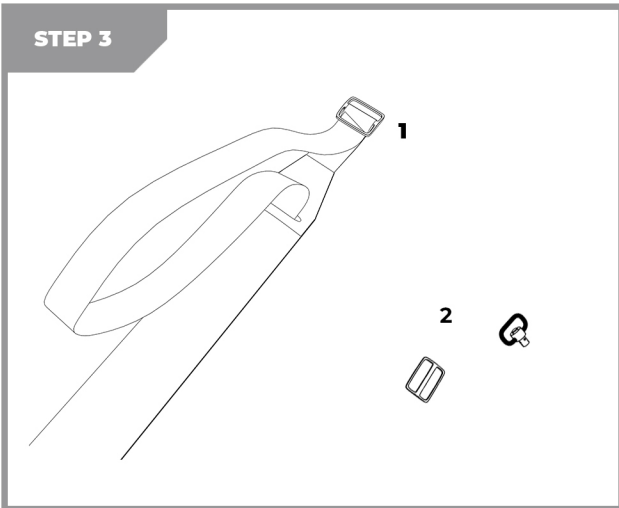

FEED WEBBING THROUGH THE TRI-GLIDE ON THE PAD AND GATHER NECESSARY HARDWARE FOR THE NEXT STEP.

STEP 4

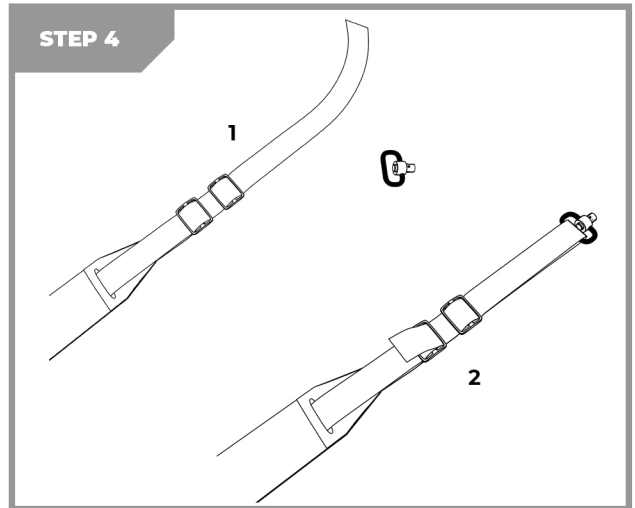


CONTINUE THIS PROCESS WITH THE 2ND TRI-GLIDE AND LOOP THROUGH THE SLING MOUNT AS SHOWN ABOVE THEN ROUTE WEBBING BACK THROUGH TRI-GLIDES.




SEC 03 ATTACHING THE SLING TO THE RIFLE

STEP 1

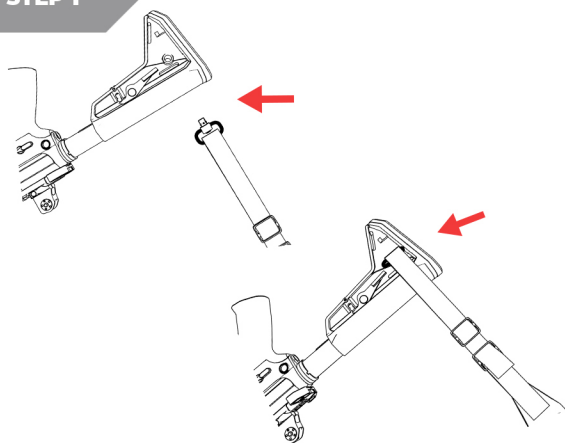

TAKE THE END OF THE SLING **WITHOUT** THE SLIDER AND PUSH THE QD SWIVEL INTO THE SOCKET OF THE BUTTSTOCK OR END PLATE.
(USER PREFERENCE)

STEP 2

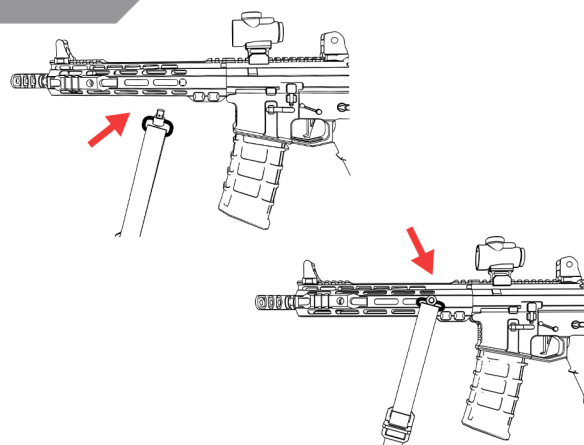


NEXT TAKE THE OTHER END OF THE SLING AND ATTACH THE QD SWIVEL INTO THE APPROPRIATE SOCKET.




SEC 04 USING THE SLING RETENTION BAND

STEP 1

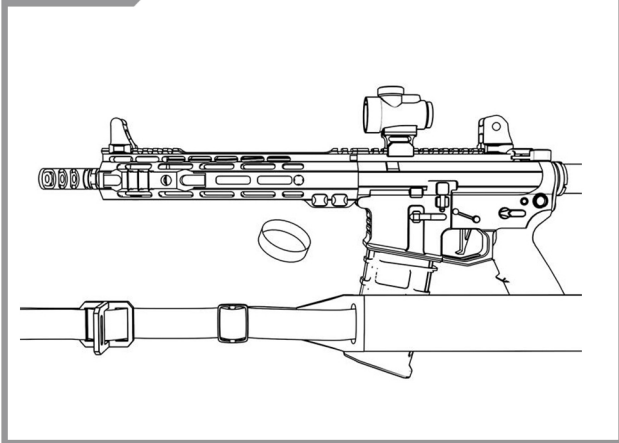


GRAB THE RANGER BAND, THE SLING AND A CLEARED RIFLE.

STEP 2

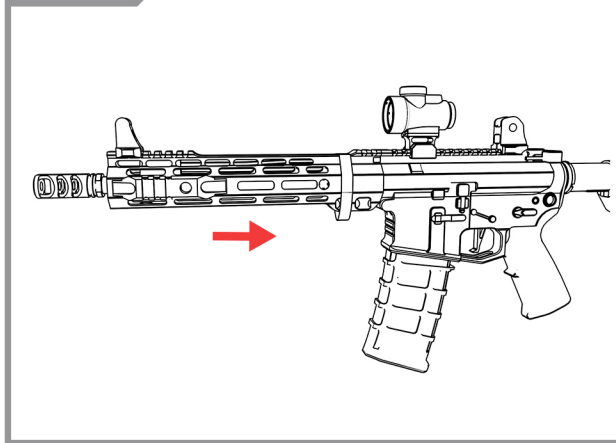


PASS THE RANGER BAND OVER THE FRONT OF THE RIFLE AND ONTO THE HAND GUARD OR RAIL.

STEP 3

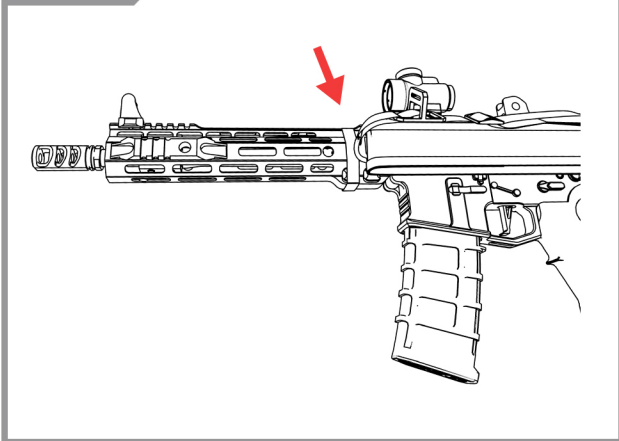

FOLD THE SLING TIGHTLY, ELIMINATING SLACK, AND HOLD IT AGAINST THE RAIL.

STEP 4

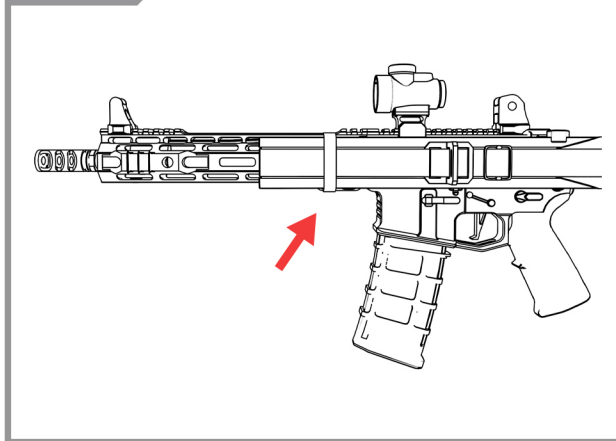


WHILE HOLDING THE SLING AGAINST THE RAIL RUN THE RANGER BAND OVER IT SO THAT IT SITS FLAT, TUCKED AGAINST THE RAIL.




SEC 05 SLING OPERATION

STEP 1

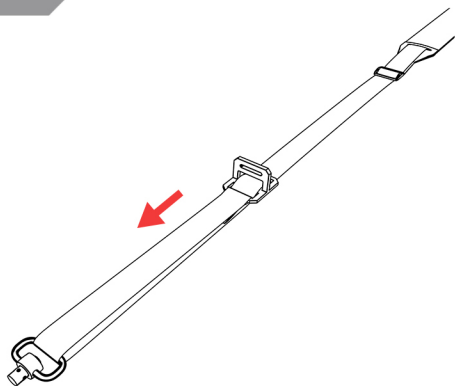

PUSH THE SLIDER FORWARD TO EXTEND THE LENGTH OF THE SLING.

STEP 2

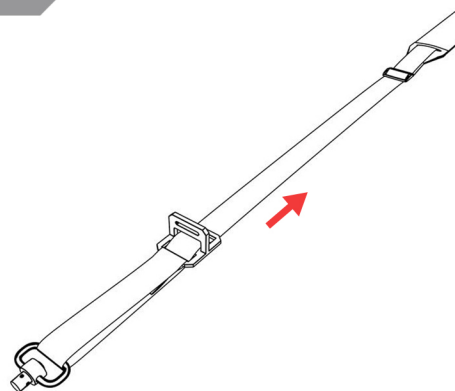

PULL THE SLIDER TOWARD YOUR BODY TO TIGHTEN THE SLING.

